




Z58

**APU[®]**

PROFILES FOR COMPOUND HEAT INSULATION SYSTEMS

Slide bearing profile **PUR-FIX CORNER ELEMENT**

For internal and external corners

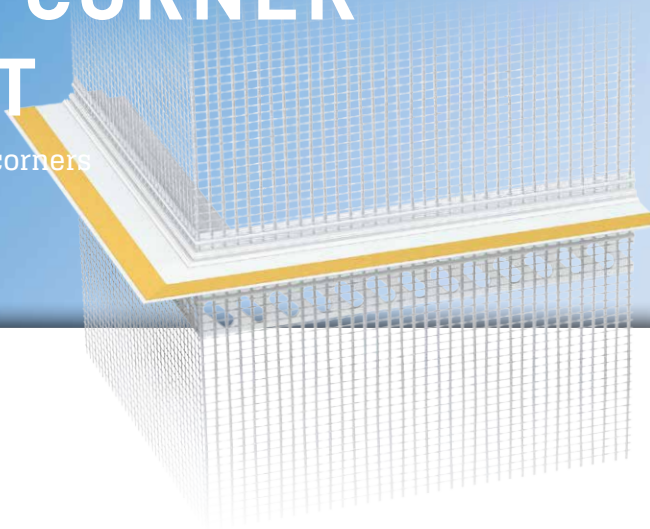

Using the **APU slide bearing profile PUR-FIX CORNER PIECES** for inner corners (Z58-I) and outer corners (Z58-A), clean, precise corners can be formed quickly and easily.

By means of the plug connectors provided (Z14) and the brackets (Z58-V) the corner pieces are connected to the incoming slide bearing profile (W58) and a clean, flush corner is produced.



Z58



Design

	ITEM NO.	LENGTH	PACKAGING UNIT	WEIGHT (per PU)
--	----------	--------	----------------	-----------------

PUR-FIX slide bearing profile - corner element

Z58

■ For internal corners	Z58-2020-I	0.2 m	5 units = 1 m	0.6 kg
■ For external corners	Z58-2020-A	0.2 m	5 units = 1 m	0.7 kg

Features

	SLIDE BEARING PROFILE
Material	■ Rigid PVC manufactured under DIN-16941
Protective flap	■ Detachable with soft TPE connection and double-sided adhesive tape
Features	■ PE foam tape 10x3 mm ■ PE foam tape 8x3 mm
Seal	■ PUR sealing strip, 10 mm, type BG1 ■ Watertight for joints of 3-9mm
Mesh	■ Min. 160 g/m² approved for compound heat insulation systems ■ 2 x 12.5 cm wide – MW 4x4 mm ■ Ultrasonic welded
Accessories	■ Z14-0000 Plug connectors (1 bag) ■ Z58-V-0000 Bracket (1 bag)
Suitable for	W58 PUR-FIX slide bearing profile

Important information

Other applications	Any applications not clearly described in the documents may be implemented only after consultation with the plaster or ETICS manufacturer.
--------------------	--


For information on materials, areas of use, tests and correct application, please refer to our 'General Advice and Information'



Z58



Details

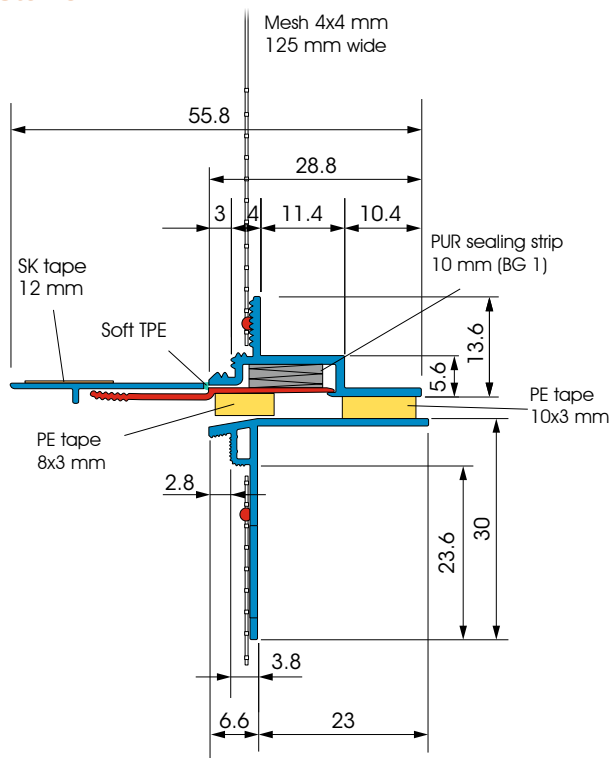

Sectional drawing in mm